

F


E

D

C




B

A

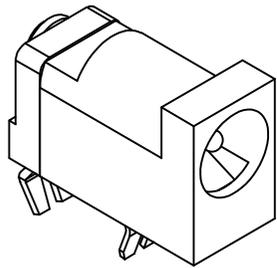

RoHS
Compliant


ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADD CENTER PIN TOLERANCE	H.Q.ZHOU	8-10-2025

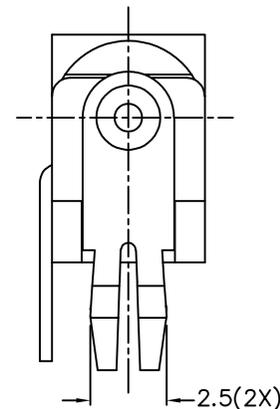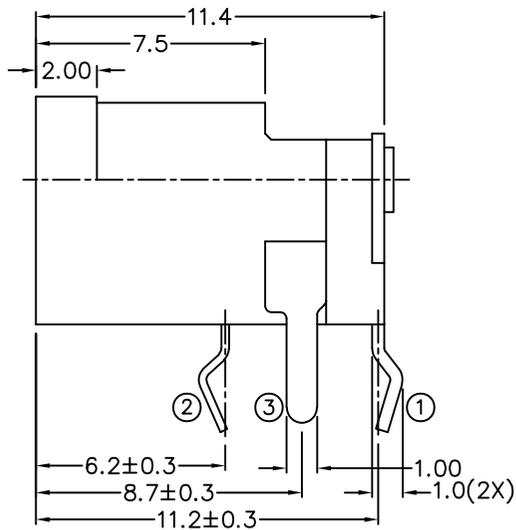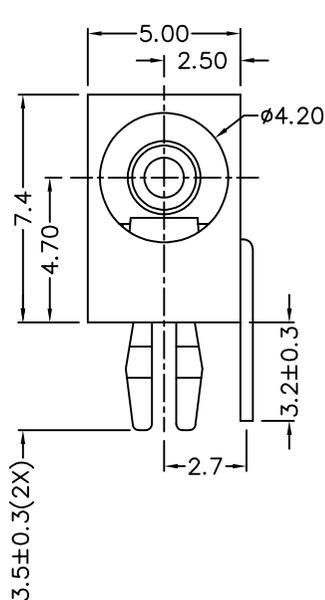


MODEL NO.	LDC-009-2	LDC-009-2
SCHEMATIC		
CENTER PIN	$\phi 1 \pm 0.05\text{mm}$ $\phi 1.3 \pm 0.05\text{mm}$	$\phi 1.65 \pm 0.05\text{mm}$
DC PLUG O.D.	$\phi 3.5\text{mm}$	$\phi 4\text{mm}$

* MATERIAL

CENTRE PIN : COPPER
 TERMINAL 1 : BRASS
 TERMINAL 2 : COPPER ALLOY
 TERMINAL 3 : BRASS
 HOUSING : THERMOPLASTIC
 COVER : THERMOPLASTIC

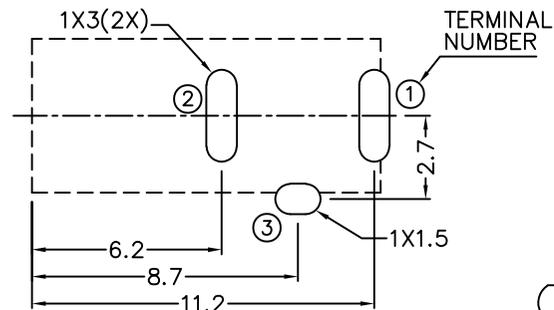

RECOMMENDED PCB LAYOUT
 TOLERANCE: ± 0.05
 (TOP VIEW)



RECOMMENDED
 DC MATING PLUG



LINKPLEX TECHNOLOGY LIMITED

DESIGN	J.X.KUANG	DATE	8-10-2003	SCALE	4:1
DRAWING	J.H.ZHOU	DATE	8-10-2025	MATERIAL	*
CHECK	H.L.TAN	DATE	8-10-2025	DWG. NO.	TZ\DC009-2-B/1.2
APPROVAL	H.Q.ZHOU	DATE	8-10-2025	SHEET	1/1

PART NAME	DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	UNIT:	mm
PART NO.	LDC-009-2	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05		

F

E

D

C

B

A