

F


E

D

C





B

A



RoHS
Compliant


ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADD CENTER PIN TOLERANCE	H.Q.ZHOU	8-10-2025

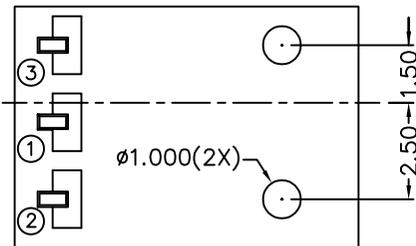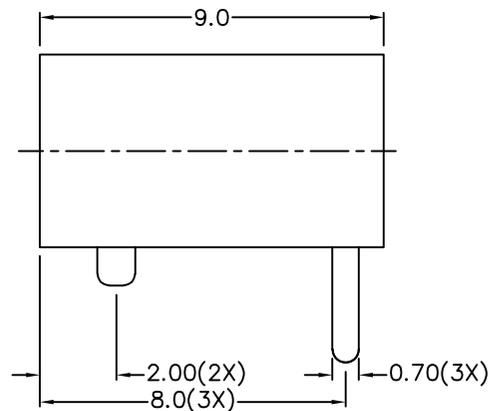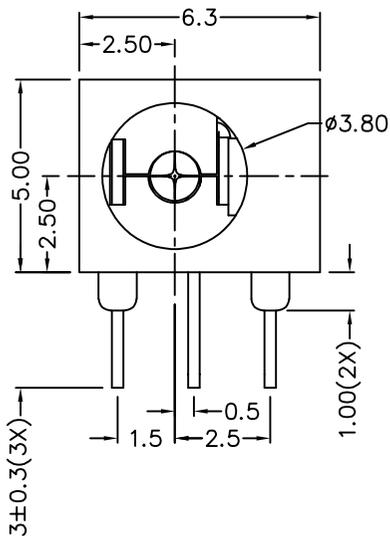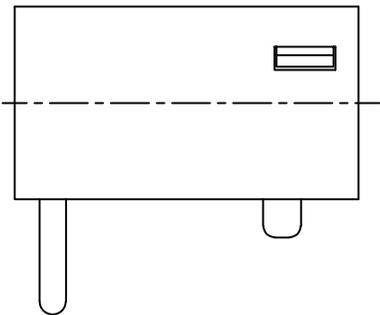


* MATERIAL

- TERMINAL 1 : BRASS
- TERMINAL 2 : COPPER ALLOY
- TERMINAL 3 : BRASS
- HOUSING : THERMOPLASTIC
- COVER : THERMOPLASTIC

MODEL NO.	LDC-015H-H3
SCHEMATIC	
CENTER PIN	ø1±0.05mm
	ø1.3±0.05mm

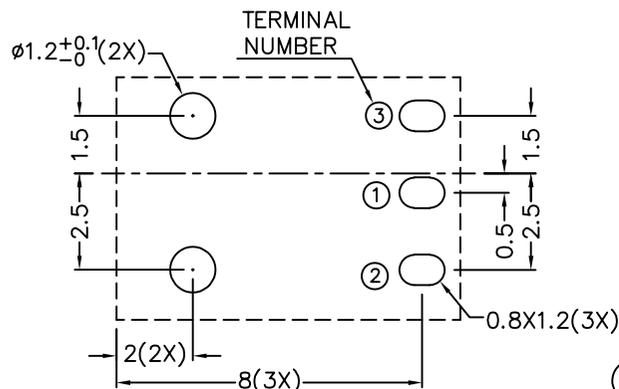

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)



RECOMMENDED
DC MATING PLUG



LINKPLEX TECHNOLOGY LIMITED

DESIGN	T.Y.LI	DATE	13-6-2005	SCALE	5:1
DRAWING	N.X.LIU	DATE	8-10-2025	MATERIAL	*
CHECK	H.L.TAN	DATE	8-10-2025	DWG. NO.	TZ\DC015H-H3-B/1.3
APPROVAL	H.Q.ZHOU	DATE	8-10-2025	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	UNIT:	
PART NO.	LDC-015H-H3	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05	mm	

F

E

D

C

B

A