
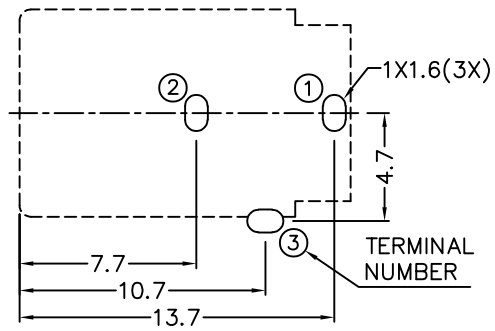
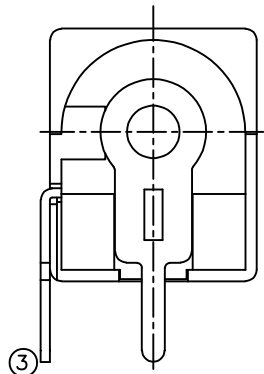
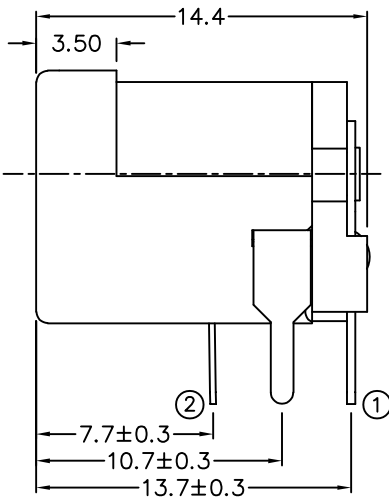


RoHS
Compliant


C		B		A	
ZONE	SYMBOL	REVISION		APPROVAL	DATE
		ADD CENTER PIN TOLERANCE		H.Q.ZHOU	8-10-2025

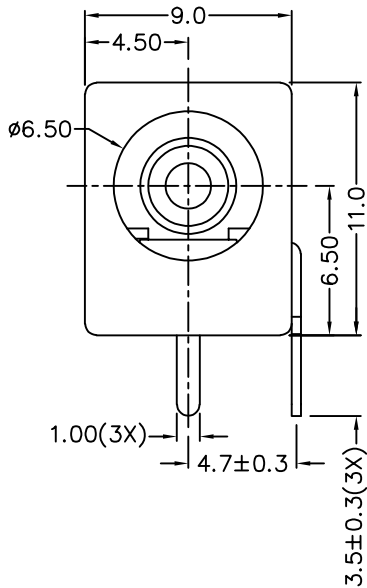

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

MODEL NO.	LDC-021H-3
SCHEMATIC	
CENTER PIN	ø1.65±0.05mm
	ø2±0.05mm
	ø2.5 ⁺⁰ _{-0.1} mm

* MATERIAL
CENTRE PIN : COPPER
TERMINAL 1 : BRASS
TERMINAL 2 : COPPER ALLOY
TERMINAL 3 : BRASS
HOUSING : THERMOPLASTIC
COVER : THERMOPLASTIC



RECOMMENDED
DC MATING PLUG

LINKPLEX TECHNOLOGY LIMITED

DESIGN	T.Y.LI	DATE	30-1-2004	SCALE	3:1
DRAWING	N.X.LIU	DATE	8-10-2025	MATERIAL	*
CHECK	H.L.TAN	DATE	8-10-2025	DWG. NO.	TZ\DC021H-3-B/1.1
APPROVAL	H.Q.ZHOU	DATE	8-10-2025	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS 0.0±0.2 0.00±0.1	UNIT:
PART NO.	LDC-021H-3	OTHERWISE SPECIFIED: 0.000±0.05	mm