

F


E

D

C





B

A

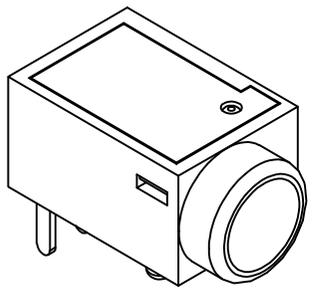

**RoHS**  
Compliant


ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADD CENTER PIN TOLERANCE	H.Q.ZHOU	8-10-2025

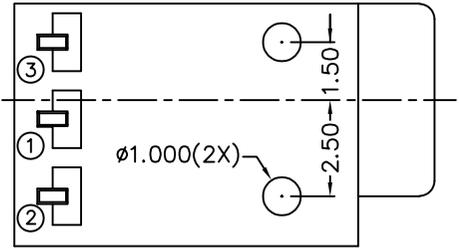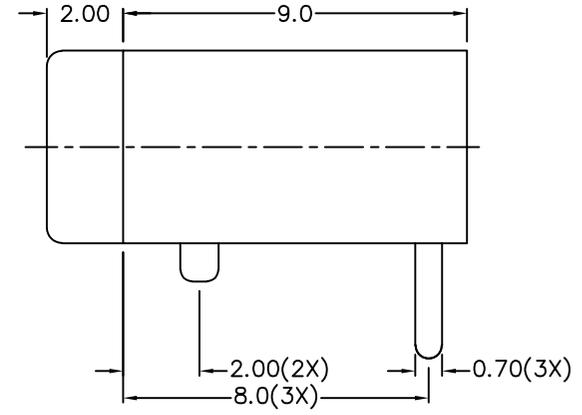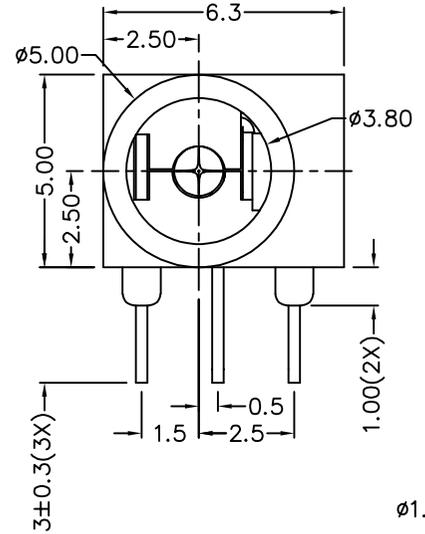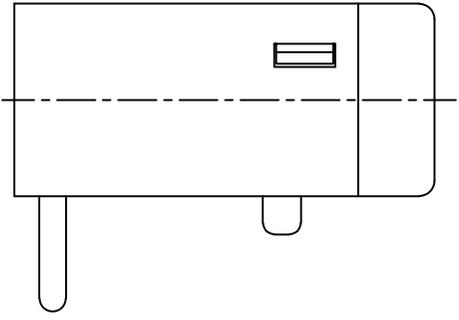


**\* MATERIAL**

- TERMINAL 1 : BRASS
- TERMINAL 2 : COPPER ALLOY
- TERMINAL 3 : BRASS
- HOUSING : THERMOPLASTIC
- COVER : THERMOPLASTIC

MODEL NO.	LDC-022H-H3
SCHMATIC	
CENTER PIN	$\phi 1 \pm 0.05 \text{mm}$ $\phi 1.3 \pm 0.05 \text{mm}$

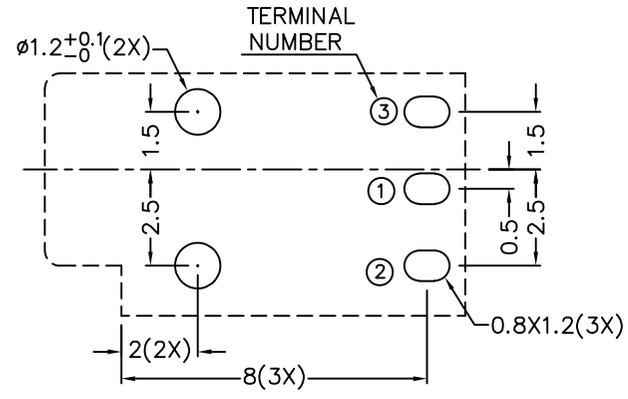

RECOMMENDED PCB LAYOUT  
TOLERANCE:  $\pm 0.05$   
(TOP VIEW)



RECOMMENDED  
DC MATING PLUG



**LINKPLEX TECHNOLOGY LIMITED**

DESIGN	T.Y.LI	DATE	13-6-2005	SCALE	5:1
DRAWING	N.X.LIU	DATE	8-10-2025	MATERIAL	*
CHECK	H.L.TAN	DATE	8-10-2025	DWG. NO.	TZ\DC022H-H3-B/1.2
APPROVAL	H.Q.ZHOU	DATE	8-10-2025	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	$0.0 \pm 0.2$	UNIT:	
PART NO.	LDC-022H-H3	OTHERWISE SPECIFIED:	$0.00 \pm 0.1$ $0.000 \pm 0.05$	mm	

F

E

D

C

B

A