

F


E

D

C

B

A

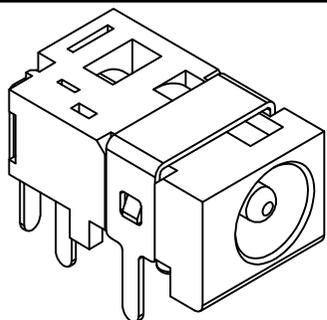

RoHS
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADD CENTER PIN TOLERANCE	H.Q.ZHOU	8-10-2025

1

1

2





2

3

3


4

4

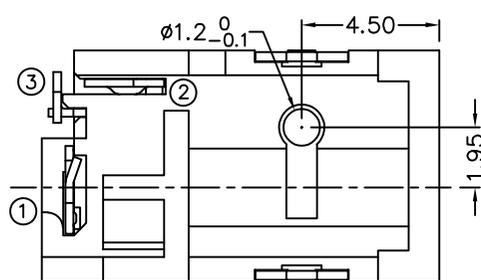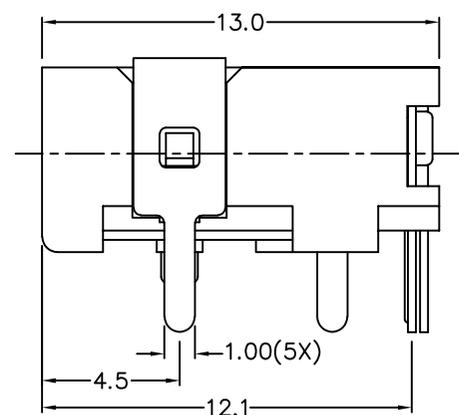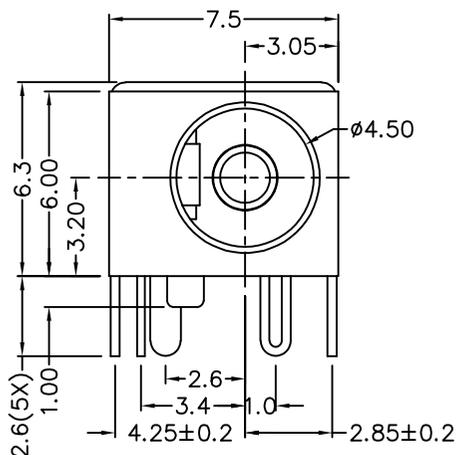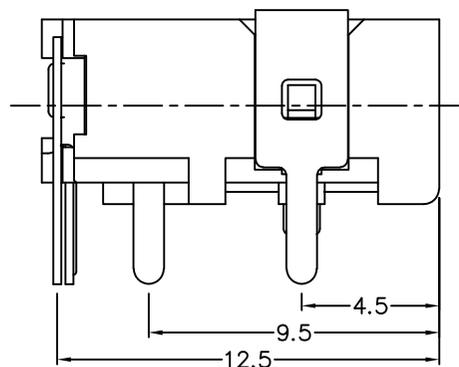


*** MATERIAL**
 TERMINAL 1 : BRASS
 TERMINAL 2 : COPPER ALLOY
 TERMINAL 3 : BRASS
 SHIELD : BRASS
 HOUSING : THERMOPLASTIC

MODEL NO.	LDC-035HS
SCHEMATIC	
CENTER PIN	∅1.65±0.05mm

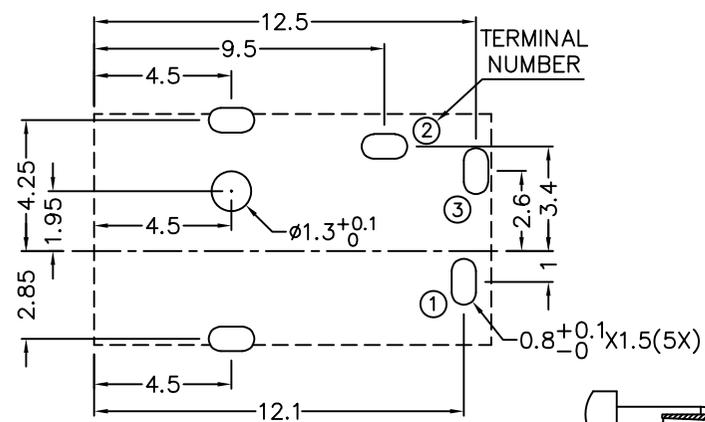

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

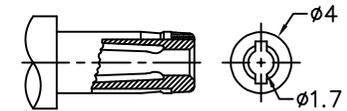

RECOMMENDED
DC MATING PLUG

LINKPLEX TECHNOLOGY LIMITED

DESIGN	J.X.KUANG	DATE	10-10-2003	SCALE	4:1
DRAWING	N.X.LIU	DATE	8-10-2025	MATERIAL	*
CHECK	T.Y.LI	DATE	8-10-2025	DWG. NO.	TZ\DC035HS-B/1.1
APPROVAL	H.Q.ZHOU	DATE	8-10-2025	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	UNIT:	
PART NO.	LDC-035HS	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05	mm	

F

E

D

C

B

A