

F

E

D







C

B

A

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADJUST THE RECOMMENDED DC MATING PLUG	H.Q.ZHOU	10-9-2023

**RoHS**  
Compliant

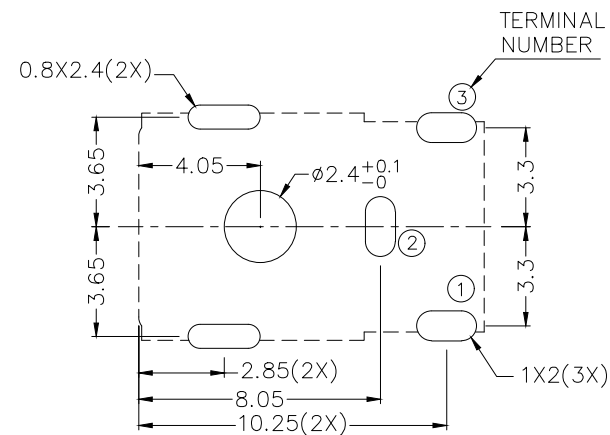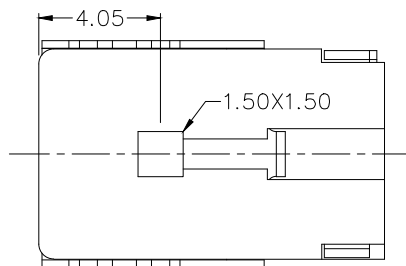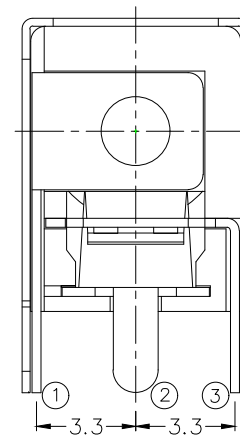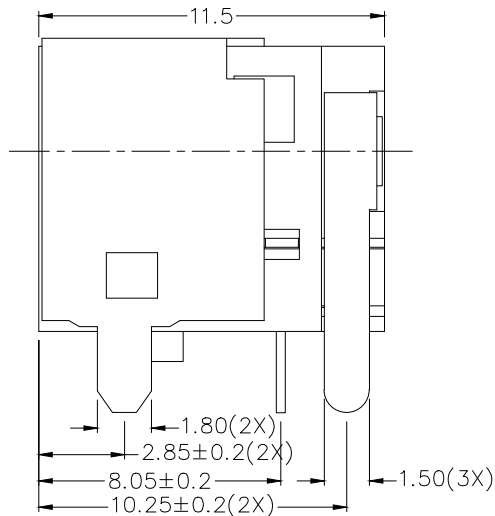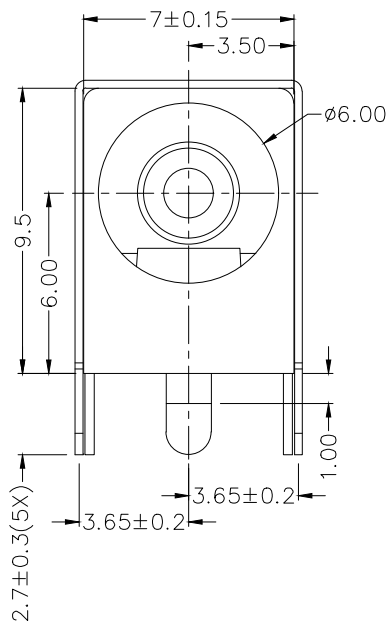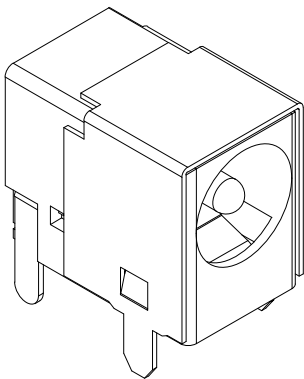


RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05  
(TOP VIEW)

MODEL NO.	LDC-038HS
SCHEMATIC	
CENTER PIN	ø1.65mm
	ø2mm
	ø2.5mm

**\* MATERIAL**

CENTRE PIN : COPPER  
 TERMINAL 1 : BRASS  
 TERMINAL 2 : COPPER ALLOY  
 TERMINAL 3 : BRASS  
 SHIELD : BRASS  
 HOUSING : THERMOPLASTIC



RECOMMENDED  
DC MATING PLUG

**LINKPLEX TECHNOLOGY LIMITED**

DESIGN	J.X.KUANG	DATE	5-1-2005	SCALE	4:1
DRAWING	T.Y.LI	DATE	10-9-2023	MATERIAL	*
CHECK	H.L.TAN	DATE	10-9-2023	DWG. NO.	TZ\DC038HS-B/1.1
APPROVAL	H.Q.ZHOU	DATE	10-9-2023	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	UNIT:	
PART NO.	LDC-038HS	OTHERWISE SPECIFIED:	0.00±0.1		
			0.000±0.05		

F

E

D

C

B

A