

F

E

D





C

B

A



RoHS
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADJUST THE RECOMMENDED DC MATING PLUG	H.Q.ZHOU	10-9-2023

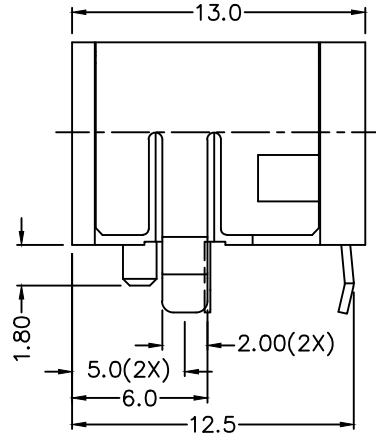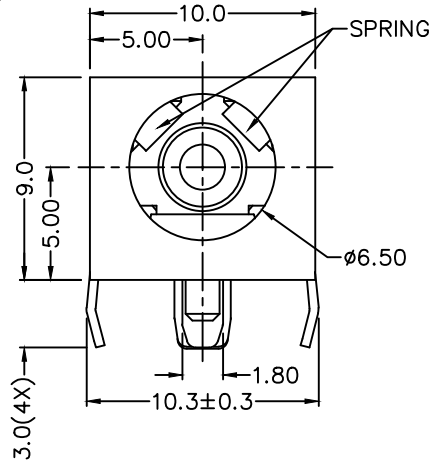


* MATERIAL

- CENTRE PIN : COPPER
- TERMINAL 1 : BRASS
- TERMINAL 2 : COPPER ALLOY
- SPRING : COPPER ALLOY
- SHIELD : BRASS
- HOUSING : THERMOPLASTIC
- COVER : THERMOPLASTIC

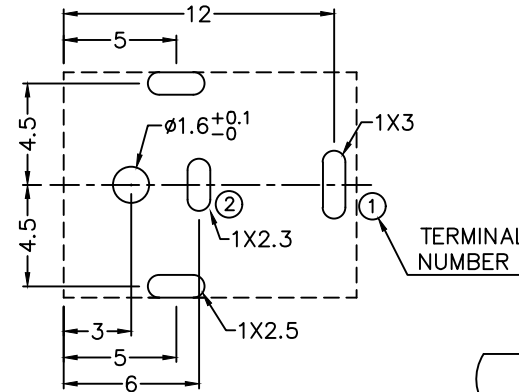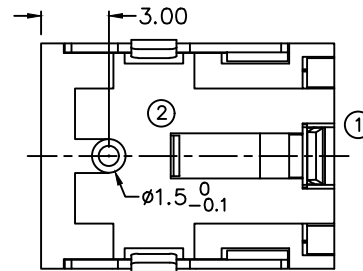

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

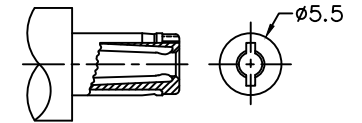

RECOMMENDED
DC MATING PLUG

MODEL NO.	LDC-078HS
SCHEMATIC	
CENTER PIN	ø2mm
	ø2.5mm

LINKPLEX TECHNOLOGY LIMITED

DESIGN	T.Y.LI	DATE	20-8-2008	SCALE	3:1
DRAWING	J.H.ZHOU	DATE	10-9-2023	MATERIAL	*
CHECK	H.L.TAN	DATE	10-9-2023	DWG. NO.	TZ\DC078HS-B/1.1
APPROVAL	H.Q.ZHOU	DATE	10-9-2023	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	UNIT:	
PART NO.	LDC-078HS	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05	mm	

F

E

D

C

B

A