

F


E

D

C





B

A

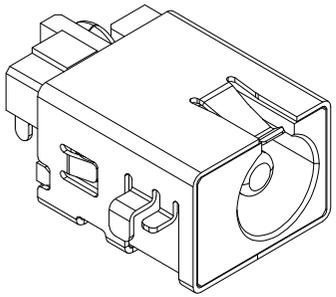

RoHS
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE

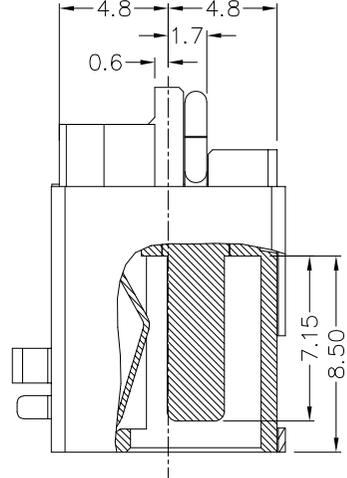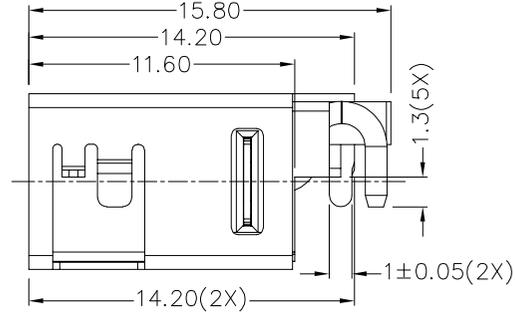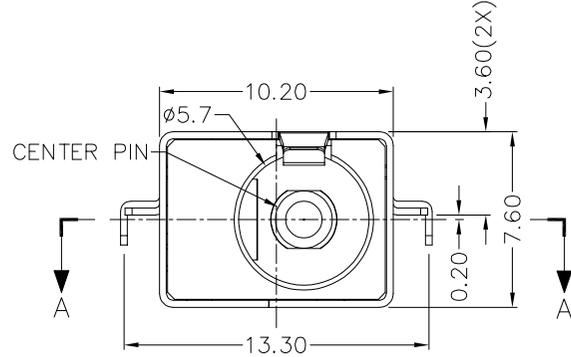
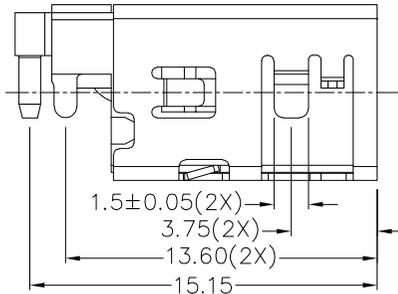


SECTION A-A


* MATERIAL

- TERMINAL 1 : BRASS
- TERMINAL 2 : BRASS
- TERMINAL 3 : COPPER ALLOY
- SHIELD : BRASS
- STOPPER : STAINLESS STEEL
- HOUSING : HIGH TEMP. PLASTIC

MODEL NO.	LDC-128HS
SCHMATIC	
CENTER PIN	ø2.00 ⁺⁰ _{-0.1} mm
	ø2.50 ⁺⁰ _{-0.1} mm

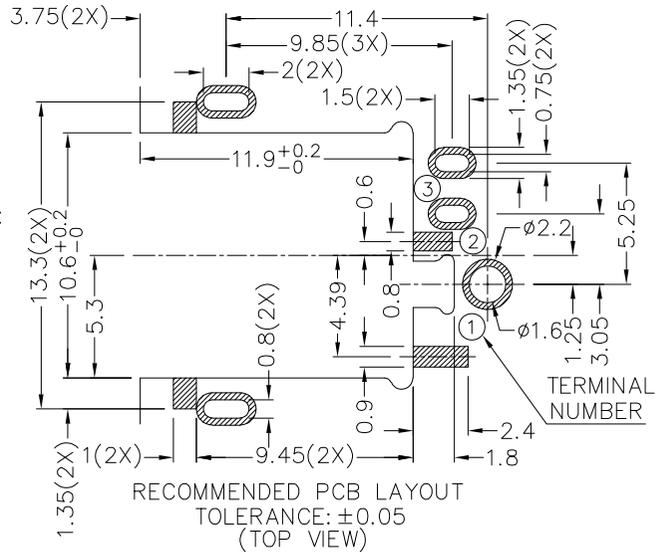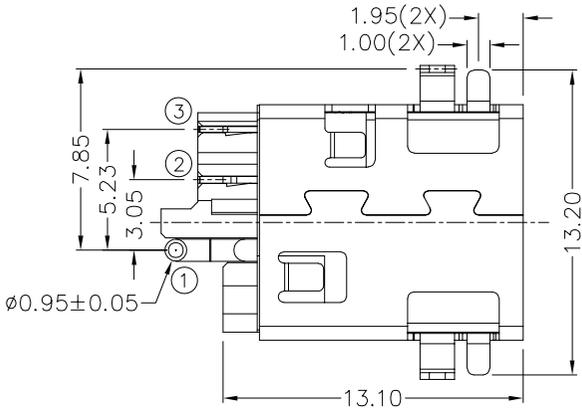

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

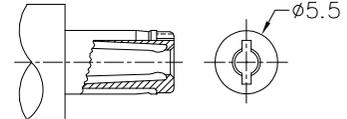

RECOMMENDED
DC MATING PLUG

LINKPLEX TECHNOLOGY LIMITED

DESIGN	G.P.YI	DATE	23-3-2022	SCALE	3:1
DRAWING	J.H.ZHOU	DATE	2-11-2025	MATERIAL	*
CHECK	T.Y.LI	DATE	2-11-2025	DWG. NO.	TZ\DC128HS-A/1.0
APPROVAL	H.Q.ZHOU	DATE	2-11-2025	SHEET	1/1

PART NAME	HIGH CURRENT DC POWER SOCKET	TOLERANCE UNLESS	0±0.5	UNIT:	
PART NO.	LDC-128HS	OTHERWISE SPECIFIED:	0.0±0.3 0.00±0.2		

F

E

D

C

B

A