

F


E

D

C

B

A




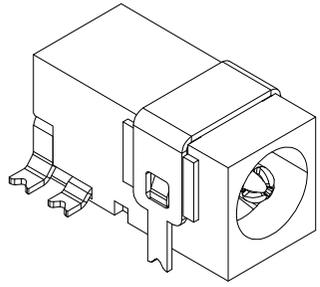


RoHS
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE

1


1

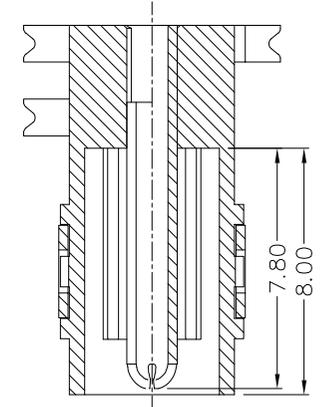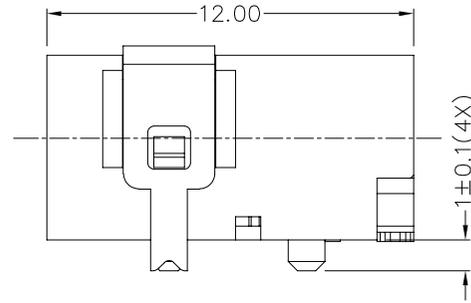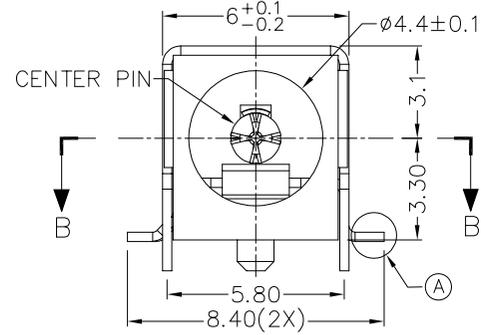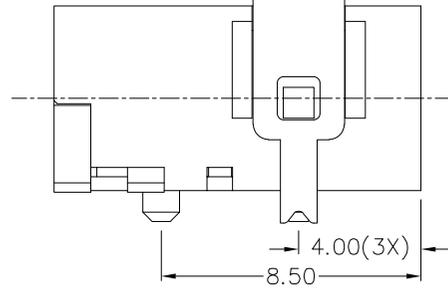


SECTION B-B

2

2




A DETAIL COPLANARITY

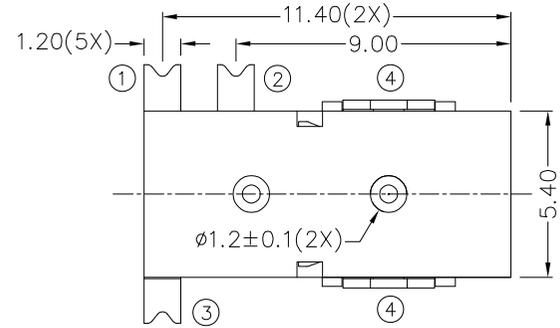


* MATERIAL

- TERMINAL 1 : BRASS
- TERMINAL 2 : COPPER ALLOY
- TERMINAL 3 : BRASS
- TERMINAL 4 : BRASS
- HOUSING : HIGH TEMP. PLASTIC

MODEL NO.	LDC-133D
SCHEMATIC	
CENTER PIN	ø1.65 ^{+0.05} / _{-0.1} mm

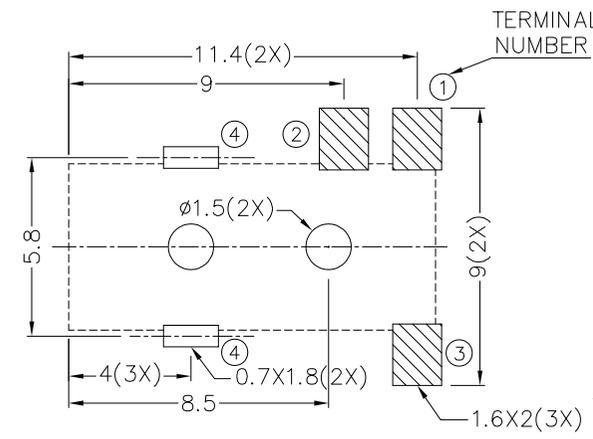

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

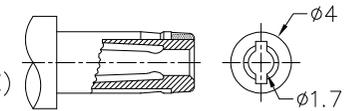

RECOMMENDED
DC MATING PLUG

3

3

4

4

LINKPLEX TECHNOLOGY LIMITED

DESIGN	G.P.YI	DATE	8-4-2016	SCALE	4:1
DRAWING	J.H.ZHOU	DATE	2-11-2025	MATERIAL	*
CHECK	T.Y.LI	DATE	2-11-2025	DWG. NO.	TZ\DC133D-A/1.0
APPROVAL	H.Q.ZHOU	DATE	2-11-2025	SHEET	1/1

PART NAME	SMD DC POWER SOCKET	TOLERANCE UNLESS	0±0.5	UNIT:	
PART NO.	LDC-133D	OTHERWISE SPECIFIED:	0.0±0.3 0.00±0.2	mm	

F

E

D

C

B

A