

F

E

D

C

B






A

RoHS
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE

NOTES:

1. Electrical
.Rated Current & Voltage:DC 12V;1.0A
.Contact Resistance:50 mohm
2. Environmental
.Operating Temperature: -40°C~+85°C
.Humidity Range:10%RH~90%RH
.Salt Spray: 48 Hours

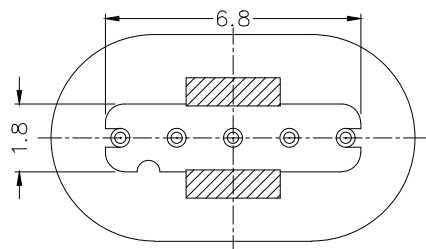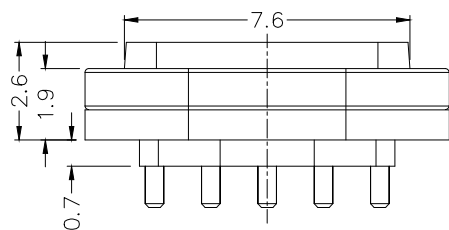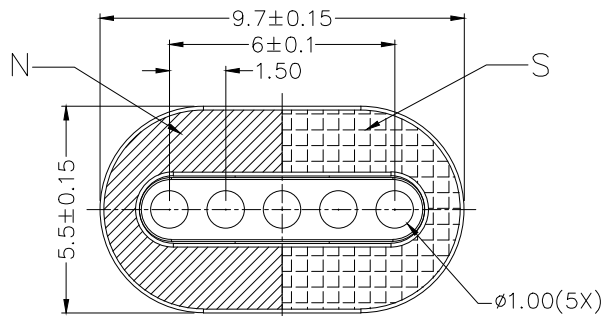

PART NAME	MATERIAL	PLATED SURFACE
PLUNGER	HBi59	AU 5U" MIN. OVER 50~120U" NI
HOUSING	HIGH TEMP.PLASTIC; UL94 V-0 COLOR BLACK	
MAGNET	NdFeB N52	PLATED NI



LINKPLEX TECHNOLOGY LIMITED

PART NAME	SPRING-LOADED CONNECTOR	TOLERANCE UNLESS	0.±0.15 0.0±0.1 OTHERWISE SPECIFIED: 0.00±0.05	UNIT:	mm
PART NO.	LPA-001				

DESIGN	J.X.KUANG	DATE	1-8-2022	SCALE	5:1
DRAWING	N.X.LIU	DATE	1-8-2022	MATERIAL	
CHECK	T.Y.LI	DATE	1-8-2022	DWG. NO.	TZ\PA001-A/1.0
APPROVAL		DATE	1-8-2022	SHEET	1/1

F

E

D

C

B

A